

# SOKKIA

# LP410

Leveling Laser

## *A 500-meter Self-leveling Laser that Boosts Productivity in Large-scale Construction Applications*

### Expanded 500-meter Working Range

- The LP410 provides a 500m (1,640 ft.) working range in diameter with its one-instrument setup to enhance productivity in large-scale construction applications.

### High-precision, High-speed Self-leveling

- High accuracy of 10 arc seconds.
- Simply press the button and the LP410 quickly levels itself and start rotating.

### Visible Red Laser

- A flashing red light in the laser-emission window makes laser projection clearly noticeable even at a distance.

### Compact, Lightweight Yet Rugged

- The lightweight 2 kg (4.4 lb.) body conforms to the IP56 specification for superior dust- and water-resistance to withstand demanding construction environments.

### H.I.Alert for Extra Reliability

- The laser beam will shut off as soon as the instrument is tilted or jarred to prevent false readings.



# LP410

Leveling Laser

## LR200 Advanced Detector



Easy-to-handle Detector Provides Outstanding Functionality and Versatility.

### High Accuracy

- Detection sensitivity can be selected from  $\pm 0.5\text{mm}$  and  $\pm 2\text{mm}$ .

### Triple Guides: LCD, LED and Buzzer

- The LR200 is equipped with LCD screens on both sides.
- 9 levels of grade display and out-of-range information.
- 3-color LEDs make it easy to locate the laser beam even at a distance.

### Double Level Vials

- Level vials are built into both the LR200 detector and the LPC5 rod clamp to enhance leveling accuracy.



### Rugged and Compact Body

- Conforming to the IP66 specification, the LR200 shuts out powder-type dust and offers protection against sudden rain showers.
- The lightweight 190g (6.7 oz.) body fits nicely in your palm.

○	▽	±0.5mm
○	▽	±2mm
Green LED Lights		
○	▽	±5mm
○	▽	2 LEDs flash alternately
○	▽	±10mm
○	▽	LED flashes rapidly
○	▽	±15mm
○	▽	LED flashes
○	▽	More than ±15mm
○	▽	LED flashes slowly
○	▽	Out of the range
○	▽	LED flashes rapidly

### LP410 Specifications

Horizontal accuracy	10 arc seconds (1.5mm/30m, 4.8mm/100m) (0.06 in./100 ft., 0.19 in./300 ft.)
Self-leveling range	$\pm 3^\circ$
Typical measuring range*	Diameter: 500m (1,640 ft.) Radius: 250m (820 ft.)
Beam diameter	8mm dia. (0.32 in.) (at projection point)
Rotation speed	600rpm
Light source	Laser diode, 650nm wavelength (visible)
Beam output	0.9mW or less
Laser class	Class 2 (IEC/CDRH)
H.I.Alert	Provided
Warning display	Out of self-leveling range Low battery
Dust and water protection	IP56 (IEC 60529:2001)
Operating temperature	-20~+50°C (-4 to +122°F)
Size	W192.5 x D167 x H189 mm (W7.6 x D6.6 x H7.5 in.)
Weight (w/batteries)	Approx. 2kg (4.4 lb.)
Power supply	R14 (C) batteries x 4
Continuous use	Approx. 60 hours (w/alkaline batteries, at 25°C (77°F))

\* Actual measuring range depends on local environmental conditions.


### LR200 Specifications

Detection sensitivity	$\pm 0.5\text{mm}$ ( $\pm 0.02$ in.) or $\pm 2\text{mm}$ ( $\pm 0.08$ in.)
Detection range	50mm (2 in.)
LCD display	9 channels, located on both sides
LED	Orange, Green (center), Red
Buzzer	Loud/Normal/Off
Level vial	Built-in
Dust and water protection	IP66 (IEC 60529:2001)
Operating temperature	-20~+50°C (-4 to +122°F)
Size	W76 x D26 X H146 mm (3.0 x 1.0 x 5.8 in.)
Weight (w/batteries)	190g (6.7 oz.)
Power supply	R6 (AA) batteries x 2
Continuous use	Approx. 100 hours (w/alkaline batteries, at 20°C (68°F))
Automatic power cut-off	Approx. 30 minutes after operation


Ideal for a Variety of Applications Including Large-scale Construction, Foundation Work, Land Preparation as well as Short-range Interior Work.




Interior

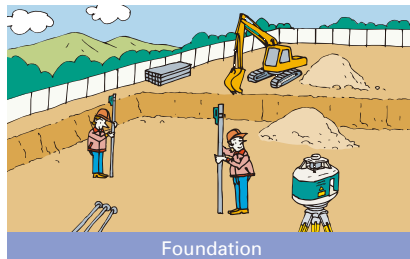

Foundation

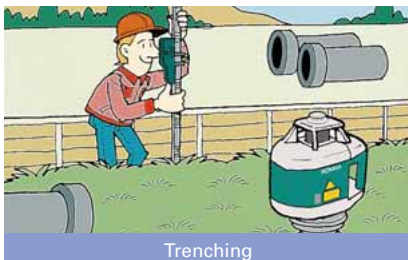

Trenching

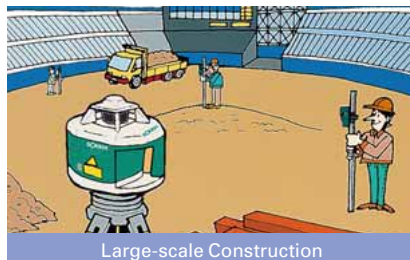

Large-scale Construction

Product names mentioned in this brochure are trademarks of their respective holders.  
Product colors in this brochure may vary slightly from those of actual products owing to limitations of the printing process.  
Designs and specifications are subject to change without notice.

[www.sokkia.co.jp](http://www.sokkia.co.jp)

SALES DEPARTMENT  
75-1, HASUNUMA-CHO, ITABASHI-KU, TOKYO, 174-8580 JAPAN  
PHONE +81-3-3558-2936 FAX +81-3-5970-2386