

SOKKIA

C300 · C310 · C320 · C330
AUTOMATIC LEVELS



28x/26x/24x/22x Telescope magnification
2.0mm Standard deviation for 1km double-run levelling



Fast, Easy-to-Use and Accurate Levels, Suited for Both Indoor and Outdoor Use

Offering you the best of SOKKIA's renowned levelling technology, the C300, C310, C320 and C330 automatic levels are compact, solid, fast and very user-friendly. For a start, setting up the levels can be done fast and quickly and sighting is just as simple.

Moreover, the C3 series automatic levels guarantee superior performance regardless of weather conditions. Apart from being immune to vibration, shock and other environmental conditions, the C3 models are fully resistant to rain and accidental dousing. Even in sudden weather changes you won't be disturbed by fogging of the instrument – you're left free to concentrate on the job.

Thanks to this solid, water and shock proof design, the C3 levels are just as well suited for outdoor use as for indoor use.

All C3 models are IPX4 compliant water resistant.



C300
Magnification 28x



C310
Magnification 26x



C320
Magnification 24x



C330
Magnification 22x


C300 · C310 · C320 · C330

AUTOMATIC LEVELS



Reliable Automatic Compensator

Even under rapidly changing atmospheric conditions, vibration and shock stability is ensured by using four suspension wires and magnetic damping action. The extended compensator range is ± 15 minutes.

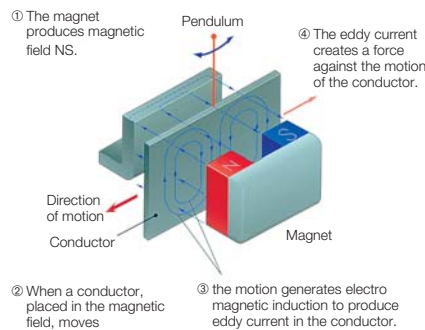

Quick and Easy Set-up

Using a dome-head tripod, setting up the C3 levels can be done fast and easily. Even on angled, uneven surfaces, all you have to do is set the level onto the tripod head and center the circular bubble. Flat-head tripods can also be used.



Convenient Horizontal Angle Measurement

All C3 series levels are equipped with an easy-to-use horizontal circle for laying off and measuring angles (direct reading to 1° or 1gon). The display window is conveniently located on the instrument base directly below the eyepiece.

Precise Collimation

All C3 models incorporate an endless horizontal motion drive with two knobs for fast and easy aiming, operable with either the left or the right hand. After turning the level in the right direction, it can be aimed at the target more precisely by using the fine motion feature.

The 22x (C330), 24x (C320), 26x (C310) or 28x (C300) telescope's optics are bright and clear. The instruments can be used easily in confined locations as well, thanks to the exceptionally short 30cm (1ft) minimum focus distance (from the center of the instrument).

Stadia

The stadia lines on the reticle make calculating distance easy: simply multiply the distance on the rod between the top and bottom stadia by 100.



Easy to adjust

With the provided tools, adjusting the reticle can be done easily by simply adjusting one screw. Adjustments to the circular level vial can be made by adjusting two screws.

Specifications

Items	C300	C310	C320	C330
Telescope				
Length	215mm (8.5in.)			
Objective aperture	36mm (1.4in.)		32mm (1.3in.)	
Magnification	28x	26x	24x	22x
Image	Erect			
Resolving power	3.5"		4.0"	
Field of view	1° 25' (2.5m/100m)			
Minimum focussing distance	0.3m (1.0ft)			
Reticle	Cross hairs			
Stadia multiplication constant	100			
Stadia additive constant	0			
Coarse sighting	Peep sight		Gun sight	
Compensator				
Damping system	Magnetic			
Working range	±15'			
Setting accuracy	0.5"			
Leveling Accuracy				
Standard deviation for 1km double-run leveling	2.0mm (0.08in.)			
Horizontal Circle				
Diameter	103mm (4.1in.)			
Graduation/Estimation	1° (1gon)/0.1° (0.1gon)			
General				
Sensitivity of circular level	10'/2mm			
Mirror for circular level	Plane mirror			
Horizontal fine motion screws	Double-sided endless drive			
Water resistance	Conforms to IPX4 (IEC60529)			
Base	Concave and flat			
Base screw	Ø5/8in.			
Size (W x D x H)	130 x 215 x 140mm (5.2 x 8.5 x 5.5in.)		130 x 215 x 135mm (5.2 x 8.5 x 5.3in.)	
Weight	Approx. 1.7kg (3.8lbs)			

Optional Accessory

DE22 Diagonal Eyepiece

A diagonal eyepiece facilitates work in tight spots with little space behind the instrument.



Standard Configuration

Instrument, lens cap, plumb bob, vinyl cover, tool kit, operator's manual and carrying case.

SOKKIA is a trademark of SOKKIA CO., LTD. Product names mentioned in this brochure are trademarks of their respective owners. Designs and specifications are subject to change without notice. Product colors may vary slightly from those of the actual products owing to the limitations of the printing process.

FIG Sokkia is a sponsor of the International Federation of Surveyors.

SOKKIA CO., LTD. Head Office, Japan Phone +81-46-248-7984 www.sokkia.co.jp ISO9001 Certified (JQA-0557)

SOKKIA CORPORATION Head Office U.S.A. Phone +1-913-492-4900 www.sokkia.com

SOKKIA CORPORATION Head Office Canada Phone +1-905-238-5810 www.sokkia.com

SOKKIA LATIN AMERICA Head Office Latin America Phone +1-305-599-4701 www.sokkia.com

SOKKIA PTY. LTD. Head Office Australia, New Zealand and South Pacific Phone +61-2-9638-2400 www.sokkia.com.au

SOKKIA B.V. Head Office Europe & other CIS countries Phone +31-4036-549600 www.sokkia.net

SOKKIA KOREA CO., LTD. Head Office Republic of Korea Phone +82-2-514-0491 www.sokkia.co.kr

SOKKIA SINGAPORE PTE. LTD. Head Office South & Southeast Asia, Middle East, and Africa Phone +65-6479-3966 www.sokkia.com.sg

SOKKIA SURVEYING INSTRUMENTS TRADING (SHANGHAI) CO., LTD. Shanghai Office, People's Republic of China Phone +86-21-63541844 www.sokkia.com.cn

SOKKIA SURVEYING INSTRUMENTS TRADING (SHANGHAI) CO., LTD. Beijing Office People's Republic of China Phone +86-10-65066066 www.sokkia.com.cn